


# Protect Chime

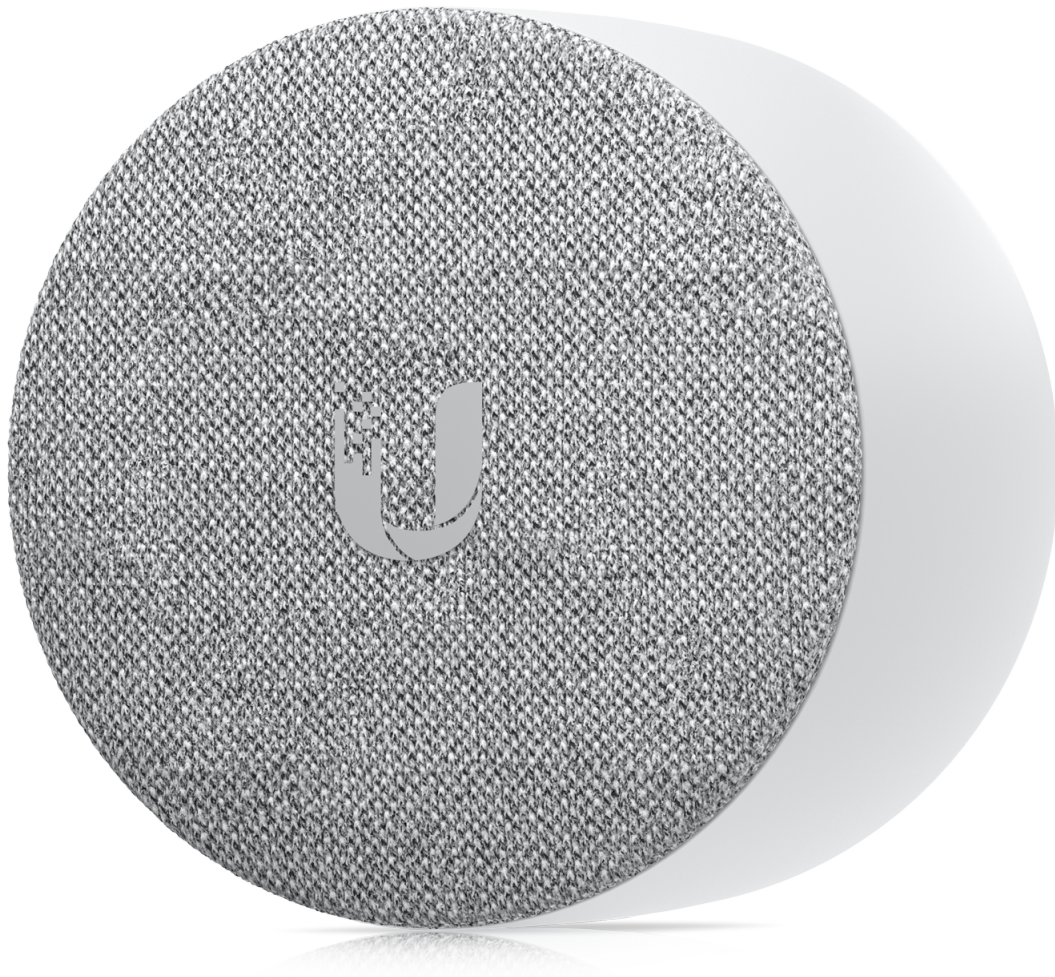

## Mechanical

Dimensions	UP-Chime-US: Ø62 x 50.6 mm (Ø2.44 x 1.99") (without prong) UP-Chime-EU: Ø62 x 68.93 mm (Ø2.44 x 2.71") (without prong)
Weight	UP-Chime-US: 127 g (4.48 oz) UP-Chime-EU: 135 g (4.76 oz)
Enclosure materials	Polycarbonate, fabric

## System

Processor	Single/Dual-Core® Xtensa® 32 bit 400MIPS
Memory	520 kB SRAM 448 kB ROM
Management application	UniFi Protect
Networking interface	WiFi 802.11 b/g/n
Button	Factory reset
LEDs	(5) White
Power method	AC
Supported voltage range	100–240V, 50-60 Hz
Max. power consumption	3.7W
Antenna gain	2 dBi
ESD/EMP protection	Air: ± 16kV, contact: ± 8kV
Operating temperature	0 to 40° C (32 to 104° F)
Operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE

## Audio

Speaker	Yes
Buzzer	Yes

## Software

UniFi OS application	UniFi Protect
Mobile apps	UniFi Protect (iOS™ and Android™)

