


OTDR Test Report

File : t02.sor	File Date : 2019-7-22 3:29:21	Task :
Cable :	Start Postion :	User :
Fiber :	End Postion :	Device Name :
Operator :	Fiber Type : Singlemode	
Wave : 1550 nm	Range : 32 km	Pulse : 320 ns
Test Mode : Auto-Test	Average Times : 5	Ior : 1.47200
End Threshold : 10.00	Non-Reflection Threshold : 0.10	Reflection Threshold : 40.00

Test Trace X:3.2km/Div, Y:10.0dB/Div

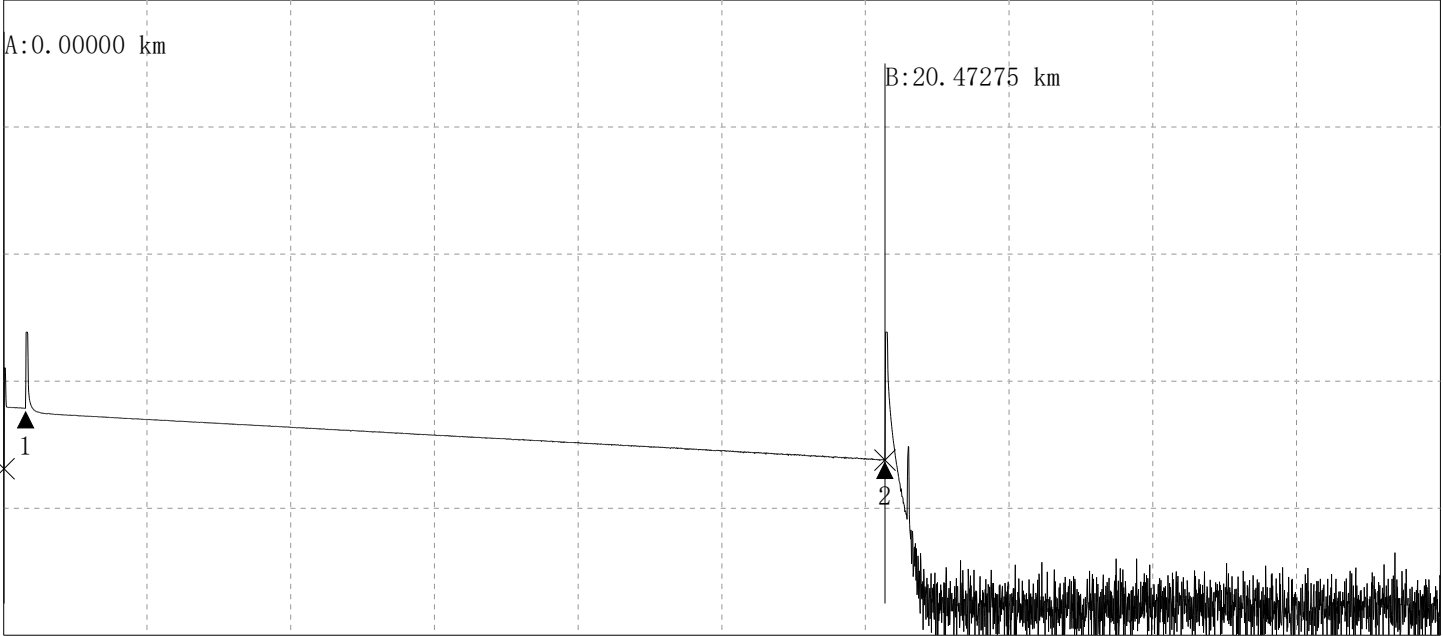

A-B Segment Information	
Distance(A-B):	20.47275 km
Loss(A-B):	4.102 dB
A-B Average Loss:	0.200 dB/km
LSA Average Loss:	0.204 dB/km
A-B Return Loss:	36.597 dB

A/B Points Information	
A Postion:	0.00000 km
B Postion:	20.47275 km
A Power:	17.972 dBm
B Power:	13.870 dBm
----	----

Fiber Link Information

Number: 2 Link Length: 20.4727 km Total Loss: 4.173 dB Average Loss: 0.204 dB/km

Event Table						
No	Type	Dis(km)	Aver. -L(dB/km)	Event-L(dB)	Return-L(dB)	Link-L(dB)
1	Reflect	0.5071	0.240	0.358	43.525	0.480
2	Reflect	20.4727	0.185	----	35.282	4.173